



### Technical Data


Accuracy: Refer to the list of specifications.  
 Display\*: LCD  
 Length standard: ABSOLUTE electrostatic capacitance type linear encoder  
 Max. response speed\*: Unlimited  
 Battery\*: SR44 (1 pc.), **938882**  
 Battery life\*: Approx. 3.5 years under normal use  
 \*Digital models \*\*Analog models

### Function of Digital Model

Origin-set, Zero-setting, Power On/Off, Data output, inch/mm conversion (on inch/metric models only)  
 Alarm: Low voltage, Counting value composition error

### Optional Accessories for Digital Model

**05CZA624**: SPC cable with data switch (40" / 1m)  
**05CZA625**: SPC cable with data switch (80" / 2m)




# Tube Thickness Caliper


## SERIES 573, 536 — ABSOLUTE Digimatic and Vernier Type

### FEATURES

- The main scale jaw is a round bar that facilitates measurements of tube wall thickness.
- With SPC data output. (Series 573)
- Supplied in fitted plastic case.

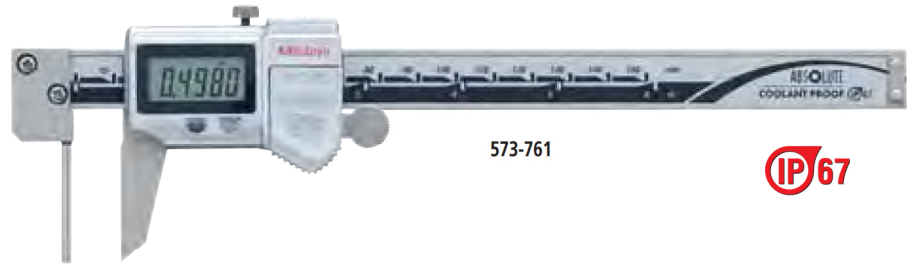

573-761

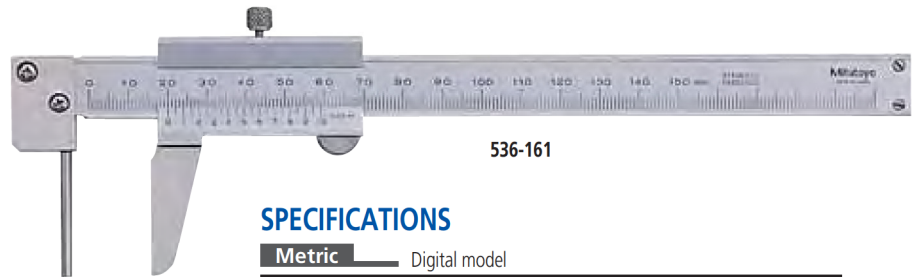

536-161

### SPECIFICATIONS

Metric		Digital model	
Range	Order No.	Accuracy	Resolution
0 - 150mm	<b>573-661</b>	±0.05mm	0.01mm

Inch/Metric		Digital model	
Range	Order No.	Accuracy	Resolution
0 - 6" / 0 - 150mm	<b>573-761</b>	±.002"	.0005" / 0.01mm

Metric			
Range	Order No.	Accuracy	Graduation
0 - 150mm	<b>536-161</b>	±0.05mm	0.05mm

### DIMENSIONS AND MASS

