

Mobile workbenches


Maximum mobility and stable work surfaces offered by the foldaway carriage! Optionally also available with a vice.




Width **1000**x depth **700** mm




Art. no. **84.660.502**
anthracite grey, RAL 7016
light grey, RAL 7035
(excl. partition material)

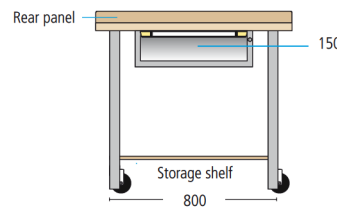


| Worktop | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 94.929.+++ |
| Urphen (green) | 50 | 880/900 | 84.649.+++ |
| Beechwood block | 50 | 880/900 | 84.650.+++ |

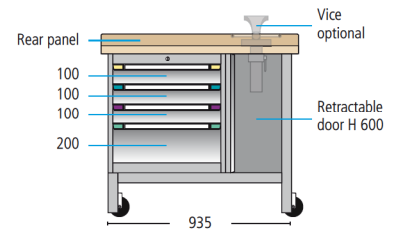

| Worktop | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 82.652.+++ |
| Urphen (green) | 50 | 880/900 | 82.654.+++ |
| Beechwood block | 50 | 880/900 | 82.653.+++ |

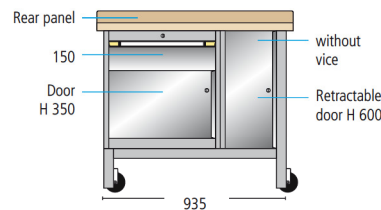


| Worktop | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 84.654.+++ |
| Urphen (green) | 50 | 880/900 | 84.655.+++ |
| Beechwood block | 50 | 880/900 | 84.656.+++ |

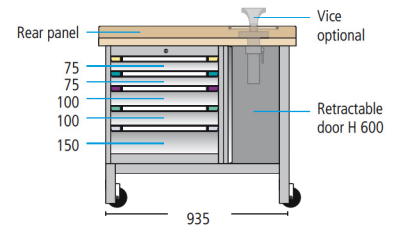

| Worktop | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 82.655.+++ |
| Urphen (green) | 50 | 880/900 | 82.657.+++ |
| Beechwood block | 50 | 880/900 | 82.656.+++ |

Vice for mobile workbenches

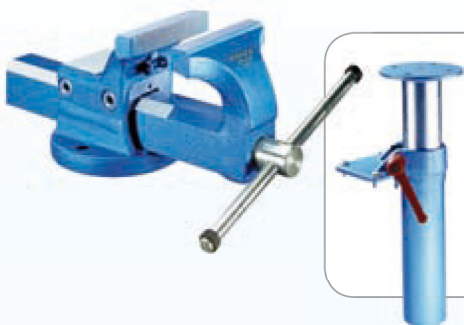

Vice and accessories

Specification

| Specification | Art. no. |
|--|-------------------|
| Vice, jaw width 115 mm | 64.157.000 |
| Height adjustment lift, lift 240 mm | 65.561.000 |
| Folding lift with height adjustment, lift 270 mm | 64.156.000 |



➤ Single parts for mobile workbenches see page 68 onwards

➤ Partition material and Thur Script see page 94 onwards





Art. no. **84.657.501**
dove blue, NCS S 4040-R70 B
light blue, NCS S 1060-R80 B
(excl. partition material)

Width **1500** x depth **700** mm

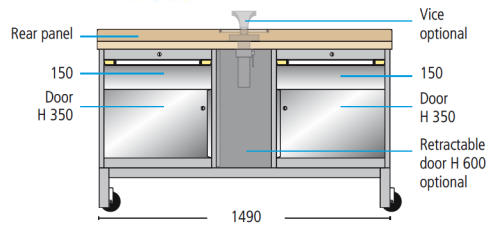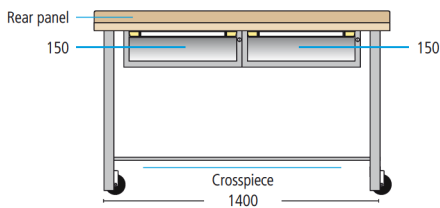

| Worktop | Worktop thickness mm | Heights mm | Art. no. | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 84.651.+++ | 40 | 870/890 | 82.658.+++ |
| Urphen (green) | 50 | 880/900 | 84.652.+++ | 50 | 880/900 | 82.660.+++ |
| Beechwood block | 50 | 880/900 | 84.653.+++ | 50 | 880/900 | 82.659.+++ |

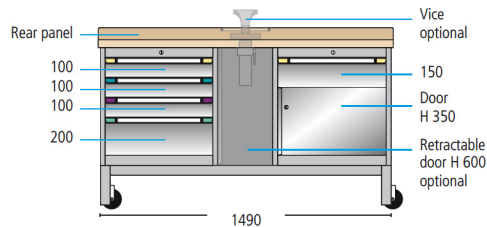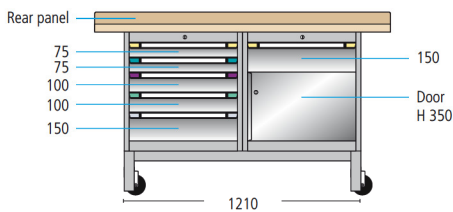

| Worktop | Worktop thickness mm | Heights mm | Art. . no.* | Worktop thickness mm | Heights mm | Art. no. |
|-----------------|----------------------|------------|-------------------|----------------------|------------|-------------------|
| Multiplex | 40 | 870/890 | 84.657.+++ | 40 | 870/890 | 82.661.+++ |
| Urphen (green) | 50 | 880/900 | 84.658.+++ | 50 | 880/900 | 82.663.+++ |
| Beechwood block | 50 | 880/900 | 84.659.+++ | 50 | 880/900 | 82.662.+++ |



Retractable door


Optional for the vice compartment for mobile workbenches, width 1500 mm

| Height | Art. no. |
|--------|-------------------|
| 600 | 63.735.+++ |



Note

Mobile workbenches with multiplex and beechwood worktops can also be delivered with workbench superstructures of up to 700 mm in height. See page 70 and onwards for more details.

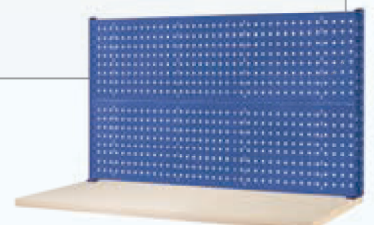

Single parts for mobile workbenches



Mobile workbench subframe

The swivel castors can be retracted and extended for **closed and mobile** workbenches using a rotary lever. This enables the workbench to be moved anywhere or used in a fixed and stable position. Overall height: Height of the subframe + 20 mm

| Specification | Width mm | Height mm | Depth mm | Housing widths mm | Art. no. |
|--|----------|-----------|----------|-------------------|-------------------|
| Frame with two housings | 935 | 830/850 | 690 | 600/330 | 63.722.+++ |
| Frame with two housings | 1210 | 830/850 | 690 | 600/600 | 63.725.+++ |
| Frame with three housings | 1490 | 830/850 | 690 | 600/280/600 | 63.729.+++ |
| Foldaway carriage, incl. castors, nylon Ø 100 mm, load bearing capacity 200 kg | - | - | - | - | 56.711.000 |



Mobile workbench subframe

The swivel castors can be retracted and extended for **open and mobile** workbenches using a rotary lever. This enables the workbench to be moved anywhere or used in a fixed and stable position. Overall height: Height of the subframe + 20 mm

| Specification | Width mm | Height mm | Depth mm | Art. no. |
|--|----------|-----------|----------|-------------------|
| Complete subframe | 800 | 830/850 | 674 | 56.834.+++ |
| Complete subframe | 1400 | 830/850 | 674 | 63.717.+++ |
| Subframe "Ergo Universal" | 800 | 900/920 | 674 | 81.108.+++ |
| Subframe "Ergo Universal" | 1400 | 900/920 | 674 | 81.109.+++ |
| Foldaway carriage, incl. castors, nylon Ø 100 mm, load bearing capacity 200 kg | - | 830/850 | - | 56.710.000 |



Drawers

for workbench compartments, usable width of 500 mm

Load bearing capacity kg

75

| Front height mm | Usable depth mm | Usable height mm | Casing height mm | Art. no. |
|-----------------|-----------------|------------------|------------------|-------------------|
| 50 | 600 | 33 | 29 | 51.240.+++ |
| 75 | 600 | 58 | 49 | 51.241.+++ |
| 100 | 600 | 83 | 76 | 51.242.+++ |
| 125 | 600 | 108 | 76 | 51.243.+++ |
| 150 | 600 | 133 | 126 | 51.244.+++ |
| 200 | 600 | 183 | 176 | 51.245.+++ |
| 250 | 600 | 233 | 176 | 51.246.+++ |
| 300 | 600 | 283 | 276 | 51.247.+++ |

Only one drawer with a front height of 150 mm can be installed in workbench compartments with a height of 180 mm



Installations

Dove grey, painted NCS S 4502-B

for workbench compartment mm

605

| Specification | Width mm | Usable depth mm | Height mm | Load bearing capacity kg | Art. no. |
|---------------|----------|-----------------|-----------|--------------------------|-------------------|
| Shelf | 590 | 600 | 25 | 75 | 81.917.000 |
| Insert shelf | 590 | 600 | 45 | 75 | 65.981.000 |



Hinged doors

One leaf, for workbench compartments:
W 605 mm, incl. lock

Door stop

left

right

| Height mm | Width mm | Depth mm | Art. no. | Art. no. |
|-----------|----------|----------|-------------------|-------------------|
| 350 | 543 | 29 | 50.833.+++ | 50.838.+++ |
| 500 | 543 | 29 | 50.845.+++ | 50.853.+++ |

